Customer		Customer P/N:	

Rev.	NO.	Description	Date

P1
4P4C F 3U″ PLUG

P2
4P4C F 3U″ PLUG

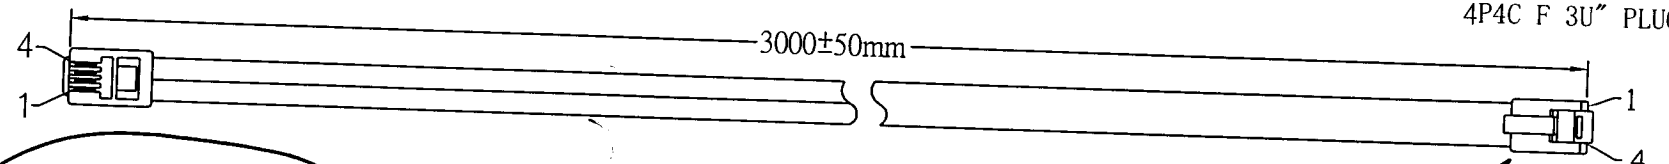

WIRING DIAGRAM:

P1	COLOR	P2
1	BLACK	4
2	RED	3
3	GREEN	2
4	YELLOW	1

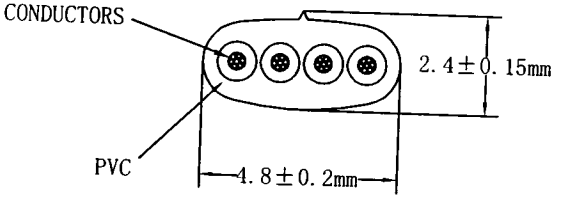

MPK 186
187
188
189
190
191

SPECIFICATION:

CABLE: 1. COMPONENT:

A. Size of conductors	:NOUL 4C*28AWG(7/0.127).
B. Color coded insulation	:(P.P) Black, Red, Green, yellow.
C. Diameter of electric	:0.95±0.05mm.
2. JACKET MATERIAL.	:PVC
A. Overall diameter	:Ave 4.8*2.4mm
B. Color.	:X

PLUG: 1. TYPE :Modular U.S F type 4p4c ,golden flash 3u″.
2. MATERIAL :PC UL 94v-2

PACKING:

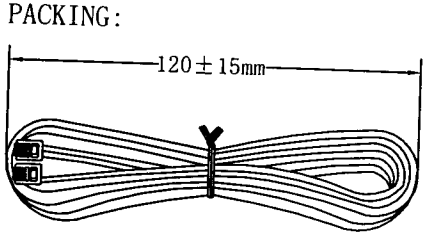

ELECTRONIC TEST:

a. OPEN/SHORT/INTERMITTENCE: 100%TEST.
b. INSULATION RESISTANCE: 300V DC/10MΩ.(MIN)
c. CONDUCTIVE RESISTANCE: 2Ω.(MAX)

NOTE: All Materials/Processes are RoHS Compliant

TECK Industrial Corp.

FILE.NO.						
DAW.NO.						
DESCRIPTION: 4P4C TO 4P4C	Rev.	A/0		Unit	Scale	Date
	Page/No.	1/1		m/m	Free	14/02/06
DRA BY	luo jian yu	CHK BY	Tony	APR BY		

PDF created with pdfFactory Pro trial version www.pdffactory.com